
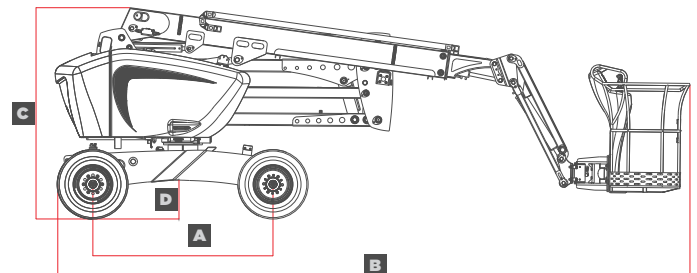
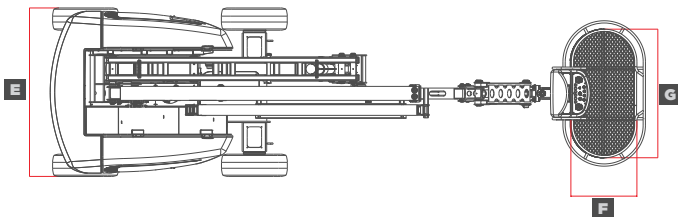


SELF-PROPELLED ARTICULATED PLATFORM

ABL 16 E-DRIVE

TECHNICAL DATA

Drive Motor	DANA Spicer E-drive Torque - Hub eS-AW	
Battery	48 V 210 Ah Lithium	
Charger	95-265 V 50 Amp	
Oil Tank Capacity	50 lt	
Weight	6200 kg	
Drive x Steer	4WD	
Max Working Height	16 m	
Platform Height	14 m	
Length - stowed	7 m	B C
Height - stowed	2,3 m	
Max Horizontal Reach	8,7 m	
Platform Capacity	230 kg	
Platform Length	0,75 m	F G E A D
Platform Width	1,5 m	
Width	2 m	
Wheelbase	2 m	
Ground Clearance	43 cm	
Drive speed - stowed	5 km/h	
Raised retracted	0,75 km/h	
Gradeability - stowed	30 %	
Tyres	8.15-15	
Jib movement	140°	
Platform rotation	175°	
Turret rotation	350°	

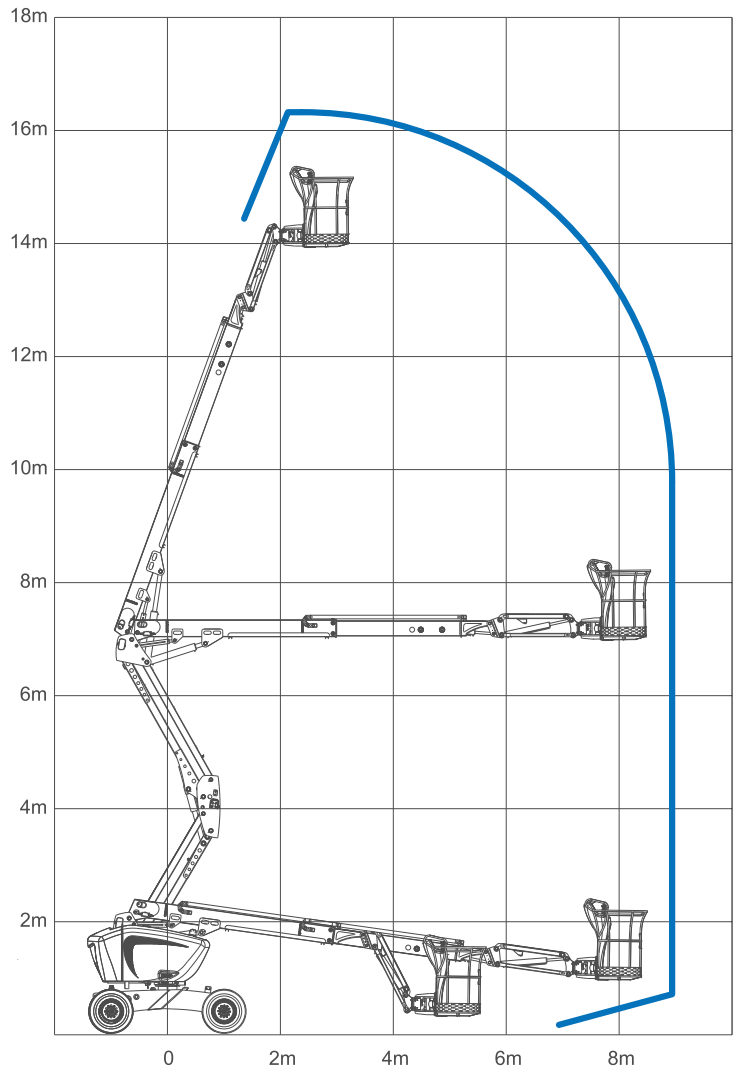



STANDART EQUIPMENT

- Full proportional controls and simultaneous boom functions
- Indoor / outdoor use possibility
- Fully proportional fast/slow electric driving possibility
- Front 2-wheel steering
- Front oscillating axle and locking system
- Moment control system
- More than one simultaneous movements for maximum productivity
- Rotating Beacon
- Travel alarm
- Tilt alarm
- %30 gradeability
- Speed change with altitude
- 230 kg (2 persons) load capacity
- Battery level indicator (upper & lower control boxes)
- Lithium Battery / Gel Battery options
- Polyester body covers
- Ergonomic polyester platform control unit
- Platform control system with 7" color screen
- 2 deadman joystick on platform
- Ground control system with 5" color screen
- CAN-BUS communication system

